

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

| | | |
|---|---|----------------------------------|
| In re Application of: |) | |
| Philip Russel James SMITH <i>et al.</i> |) | Group Art Unit: Not Yet Assigned |
| Serial No.: Not Yet Assigned |) | Examiner: Not Yet Assigned |
| Filed: March 18, 2004 |) | Attorney Docket No. 66347-104 |
| For: TUBE FOR STORING FLUID |) | |

SUBMISSION OF PRIORITY DOCUMENT


March 18, 2004

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

The Applicants request priority of his EP Patent Application No. 03252960.4, filed May 13, 2003.

Respectfully submitted,
DYKEMA GOSSETT PLLC

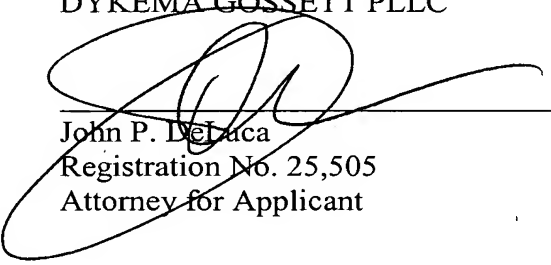
John P. DeLuca
Registration No. 25,505
Attorney for Applicant

DYKEMA GOSSETT PLLC
THIRD FLOOR WEST
1300 I Street, N. W.
Washington, D.C. 20005
(202) 906-8600

THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03252960.4

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

THIS PAGE BLANK (USPTO)



Anmeldung Nr:
Application no.: 03252960.4
Demande no:

Anmeldetag:
Date of filing: 13.05.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

The Automation Partnership (Cambridge)
Limited
York Way
Royston,
Hertfordshire SG8 5WY
GRANDE BRETAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Tube for storing fluid

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

B01L/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

THIS PAGE BLANK (USPTO)

TUBE FOR STORING FLUID



5 The present invention relates to tubes for containing microlitre volumes of fluid and, more particularly, to a tube of low internal volume adapted to engage with a plate.

10 In many laboratory applications it is preferred to work with increasingly small volumes of fluid. These volumes of fluid are generally stored in small tubes which are, in turn, located in apertures formed in a plate. The plate, with its plurality of tubes, can then be transported from a storage area to a fluid dispensing apparatus. Fluid can be dispensed from the apparatus into the tubes. As a result of the large numbers of these tubes required by modern laboratory practice it is preferable to minimise the size of the plate for a given volume of fluid or number of tubes to be stored.

15 There are a number of problems associated with the tubes used at present. In general the tubes are circular in cross section and slot into the plate, forming an interference fit between the tube and the plate and slightly deforming the tube. EP-A-0 904 841 discloses a system handling 384-well (aperture) plates in which individual sample tubes are supported in plates in such a way as to be capable of movement into or out of the plates from either side of the plate. To this end the tubes also have a near constant cross-sectional area to enable them to move through the plate.

25 Some reagents stored within the tubes are volatile or inclined to react with or become contaminated by the surroundings. Therefore it is known to apply a cover to the tube, either in the form of a lamina material that maintains its integrity until pierced or in the form of a self-sealing membrane that allows the tube's contents to remain isolated from the environment even after further reagents have been added to the tube using a dispensing apparatus.

30 In some applications there have been problems associated with these closure members, in particular with the closure members maintaining contact with the dispensing tip and therefore causing the tube to be pulled out of its well. This results in the tube being dissociated from its correct position in the plate and, if the dispensing apparatus is not stopped and the array of dispensing tips attempts to

35

dispense to the next row of tubes, the machine may jam, damaging the machine, the tubes and compromising the samples stored in the tubes.

According to the present invention there is provided a tube for storing micro-
5 litre volumes, the tube being open at one end and comprising:
a body portion of substantially square cross section;
a shoulder portion at one end of the body portion and providing the open end
of the tube, the cross section of the shoulder portion being greater than that of the
body portion; and,
10 a formation providing a snap fit connector portion at the other end.

The tube may further comprise a closure member disposed to close the open
end. The closure member may take the form of a foil cap or a self-sealing member,
for example a split-septum.

Preferably, the body and shoulder portions are formed separately from the
15 snap fit connector portion.

The snap fit connector portion may have a dot code on it.

The body and shoulder portions may be formed from a translucent or
transparent material.

The tube may further comprise a spigot at the interface between the body
20 portion and the snap fit connector portion.

The body portion and the snap fit connector portion may be co-moulded.

The square cross section of the body and the provision of shoulder portions on
the tube have a number of advantages. Firstly, the tube fits closely with the aperture
25 in which it is stored without deforming the tube in any way. Secondly, in applications
where it is necessary to make an optical reading of the spectrum of the contents of
the tube, it is important that the reading is taken through a consistent thickness of the
material of the tube and a constant cross section of the fluid. In order to achieve this,
when the tube is of circular cross section it is important to line up the optical reading
30 apparatus such that the light beam passes through the diameter of the tube, this
maximises the path length through the material contained within the tube and also
reduces the effects of refraction from the tube itself. However, using a tube according
to the present invention, this precise alignment is unnecessary because the thickness
of the material of the tube through which the light passes is the same whatever path

across the tube is taken by the light as long as it is perpendicular to one side of the tube.

An example of the present invention will now be described with reference to the accompanying drawings in which:

Figure 1 is a cross section of a tube according to the present invention.

Figure 2 is a view of the bottom of the tube according to the present invention.

Figure 3 is a top view of an array of tubes according to the present invention.

Figure 4 is a top view of a plate containing a number of tubes according to the present invention.

Figure 5 is a cross section of a plate containing a number of tubes according to the present invention.

Figure 1 shows a tube 10 according to the present invention resting in a bore 20 that is formed in a plate containing a plurality of such bores 20. The tube 10 consists of a body portion 11 which has a square cross section. At the top of the body portion 11 of the tube 10, at its open end, is a shoulder portion 12. The shoulder 22 of the shoulder portion 12 allows the tube 10 to engage with the top surface of the bore 20. The shoulder 22 is the same length on all four sides of the tube 10. This prevents the tube 10 from being pushed through the bore 20. In addition the provision of a shoulder portion 12 allows a variety of tubes 10 capable of containing differing volumes to be used in the same size plate. Although all of the bores 20 within a plate are the same size, constraining the volume of fluid that can be held in the body portion 11 the overall volume of the tube 10 can be increased by extending the shoulder portion 12 vertically.

At the bottom of the body portion 11 is a snap fit connector portion 13 that enables the tube 10 to be secured into position within the bore 20 without the bore needing to be adapted in any way. The snap fit connector portion 13 has a profile that tapers outwards from the bottom of the body portion 11 of the tube 10. At the bottom of the connector portion 13 there is a surface 14 onto which a dot code can be printed. This surface 14 is preferably square although it may be round. The snap fit connector portion 13 is preferably constructed from a substance with elastic qualities thereby allowing the connector portion to travel through the bore 20 and then to snap

into place at the base of the bore 20 as shown in Figure 1. The connector portion 13 prevents the tube 10 from being lifted out of the bore 20 unintentionally.

5 The body and shoulder portions 11, 12 can be formed separately from the snap fit connector portion 13. Alternatively they may be co-moulded. There is a spigot 18 at the bottom of the body portion 11 that interfaces with the snap fit connector portion. The body and shoulder portions 11, 12 are preferably formed from an inert, resilient material, for example polypropylene. The body and shoulder portions 11, 12 are also translucent in order to facilitate the taking of optical spectra of
10 the contents of the tube 10. In contrast, the snap fit connector portion 13 is preferably black in order to maximise the contrast between the laser marked dot code and the connector portion 13. Furthermore, the snap fit connector portion is deformable in order to pass through the bore 20.

15 The tube 10 is sealed by a sealing member 15 which may be a foil cap or a self-sealing closure member such as a split septum.

Figure 2 shows a dot code 16 on the base portion 14 of the snap fit connector portion 13.

20

Figure 3 shows a two dimensional array 17 of tubes 10 disposed within a plate 19. The plate 19 forms a grid of bores 20. The plate 19 is constructed from two sets of substantially perpendicular intersecting walls 21. The walls 21 have a thickness T. The length of the shoulder 22 is substantially $\frac{1}{2}T$ so that the shoulder portions 12 of
25 the tubes 10 tessellate thereby optimising the use of the space above the plate.

Figure 4 shows part of a plate 19 that has been partly-filled with tubes 10.

Figure 5 shows a cross section through a plate 19 containing a number of
30 tubes 10. The shoulder portions 12 of the tubes 10 tessellate and thereby use all of the available space above the plate 19.

CLAIMS



1. A tube for storing micro-litre volumes, the tube being open at one end and comprising:
 - 5 a body portion of substantially square cross section;
 - a shoulder portion at one end of the body portion and providing the open end of the tube, the cross section of the shoulder portion being greater than that of the body portion; and,
 - a formation providing a snap fit connector portion at the other end.
- 10 2. A tube according to claim 1, further comprising a closure member disposed to close the open end.
3. A tube according to claim 2, wherein the closure member comprises a foil cap.
- 15 4. A tube according to claim 2, wherein the closure member is a self-sealing member.
5. A tube according to claim 4, wherein the self-sealing closure member is a split septum.
- 20 6. A tube according to any of the preceding claims, wherein the body and shoulder portions are formed separately from the snap fit connector portion.
- 25 7. A tube according to claim 6, wherein the snap fit connector portion has a dot code on it.
8. A tube according to claim 6 or claim 7, wherein the body and shoulder portions are formed from a translucent or transparent material.
- 30 9. A tube according to any of claims 6 to 8, further comprising a spigot at the interface between the body portion and the snap fit connector portion.
10. A tube according to any of the preceding claims, wherein the body portion and the snap fit connector portion are co-moulded.
- 35

THIS PAGE BLANK (USPTO)



ABSTRACT

A tube for storing micro-litre volumes is provided. The tube is open at one end and comprises a body portion of substantially square cross section; a shoulder portion
5 at one end of the body portion and providing the open end of the tube, the cross section of the shoulder portion being greater than that of the body portion; and a formation providing a snap fit connector portion at the other end.

THIS PAGE BLANK (USPTO)

Figure 1

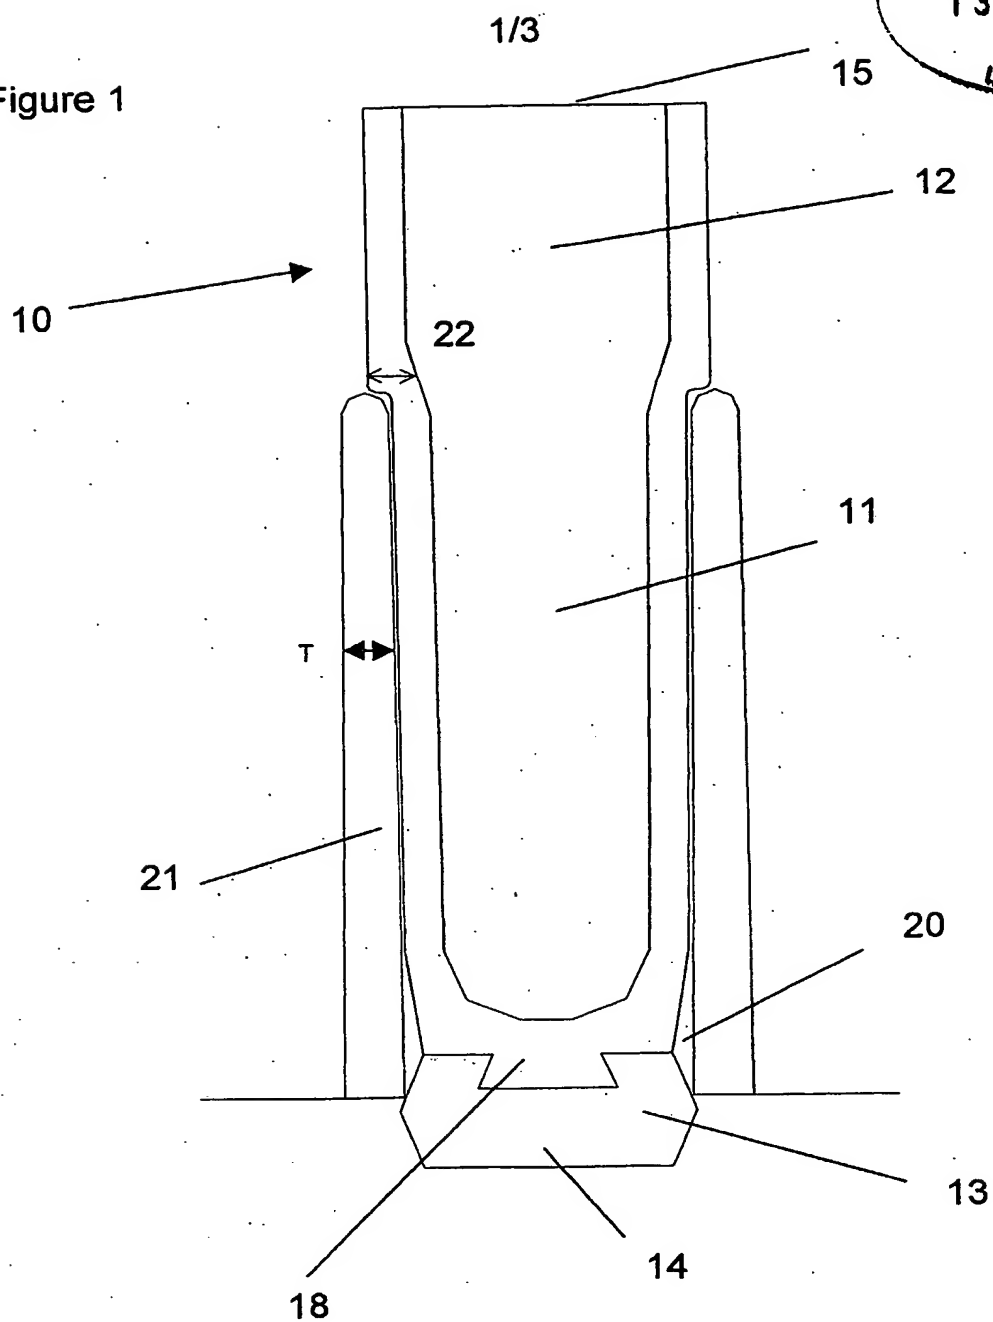


Figure 2

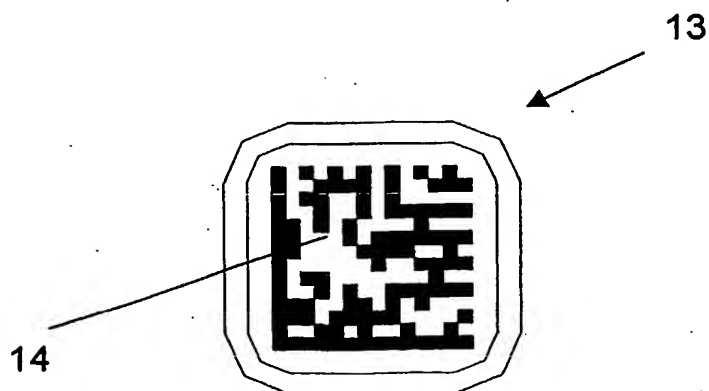


Figure 3

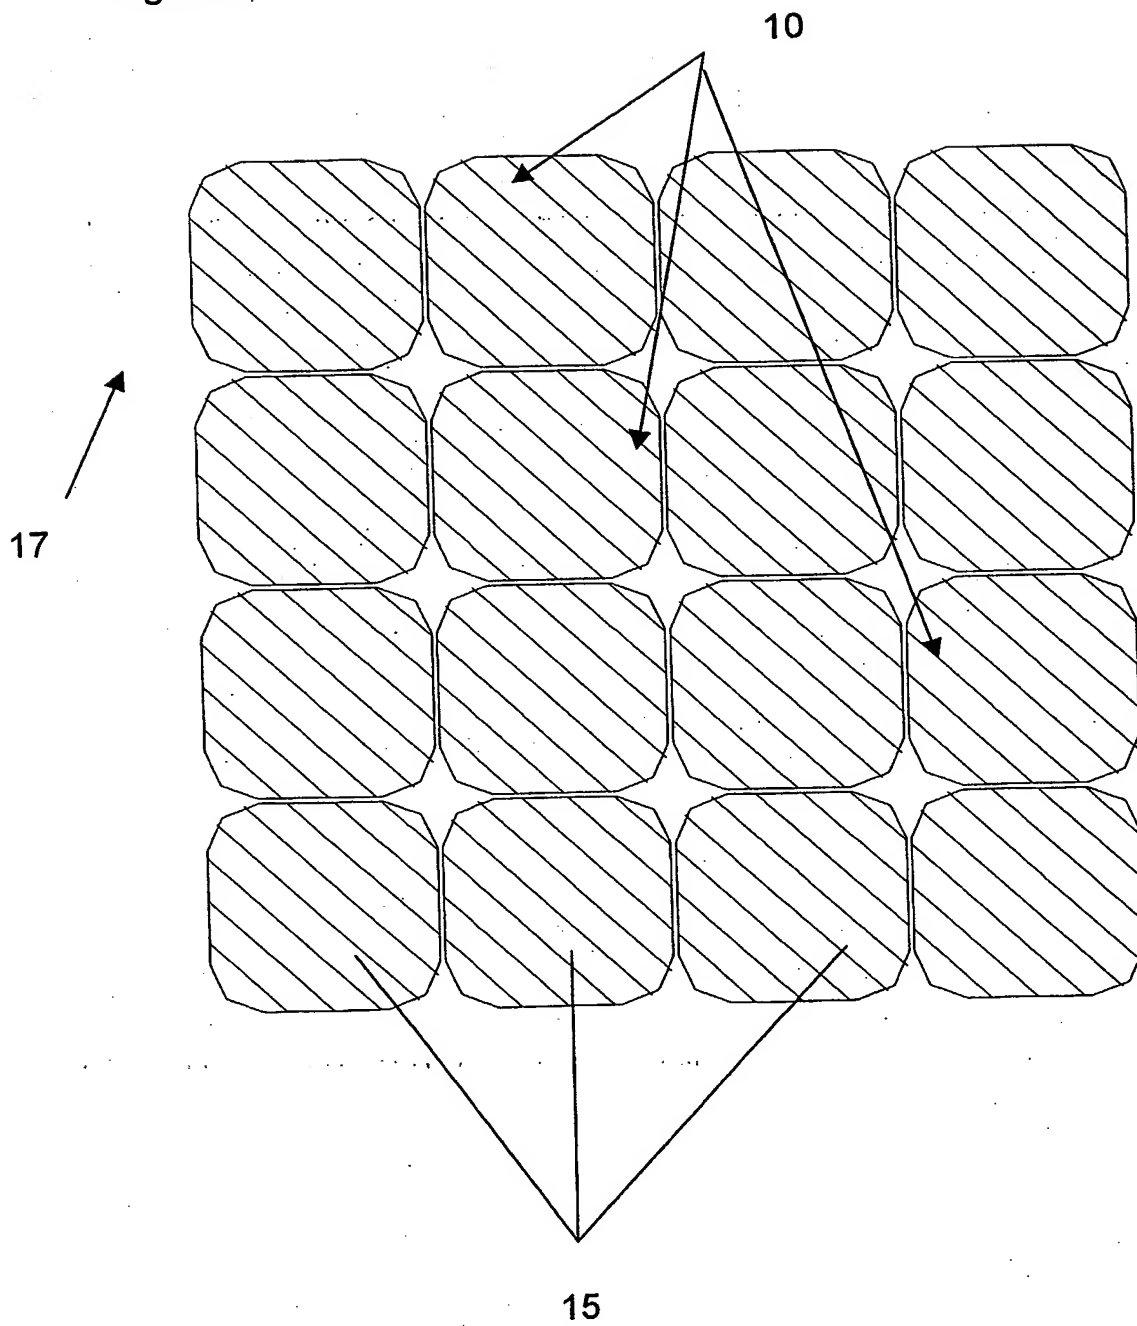


Figure 4


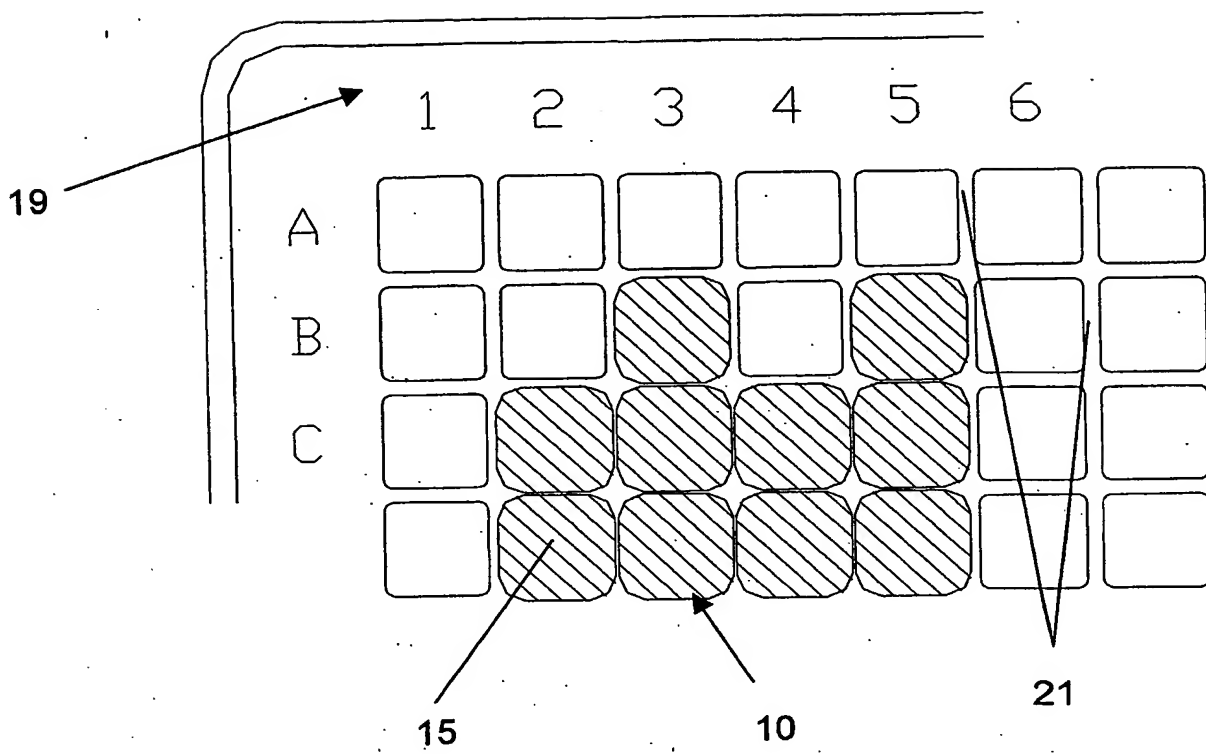


Figure 5

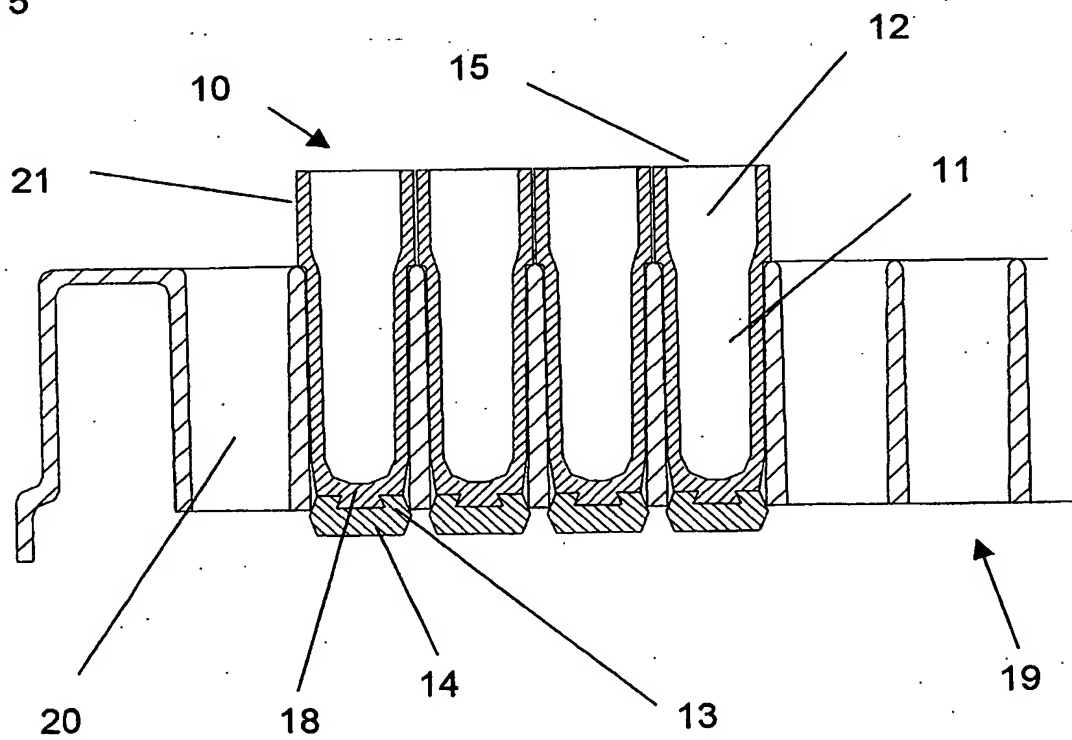

THIS PAGE BLANK (USPTO)